

# TANGRAM HB

**BUCK**  
www.buck.lighting

Industrial lighting  
Street lighting  
Facade lighting



Modularity  
Light output ratio (LOR  $\geq 0.95$ )  
Wide application range  
Wide range of optics

**BUCK GmbH**  
Taunustor 1  
60310 Frankfurt am Main  
office@bucklicht.de  
www.buck.lighting

Copyright © 2021 BUCK, edition: 4





**TANGRAM HB** is top quality, highly energy efficient LED luminaire, suitable for extreme ambient conditions. Wide range of light output and light distributions make it suitable for different types of lighting in public spaces. Lighting management leads to smart energy consumption.

Efficiency  
95%

40 different  
optics



Ambient  
temperatures  
30 - 55°C

#### ENERGY EFFICIENCY

By choosing appropriate light distribution and distances between luminaires, depending on heights, there are significant reductions in required installed power (compared to standard light sources).

Considering longevity of all components (>100,000h), the need for maintenance is reduced, leading to additional savings.



THERMAL  
MANAGEMENT



INNOVATION




## OPEN DESIGN

Aluminum heatsink with vertical ribs promotes an air flow that cools the LEDs and allows smooth operation of lamps at extreme ambient temperatures up to 55°C. Each LED source has its own heatsink. Separating the light module and control gear prevents heat transfer to the control gear ensuring its longevity and reliability.

## THERMAL MANAGEMENT

The combination of robust heat sink and IP protection of LED modules enables excellent thermal management and safe operation over life time. Open design of luminaire provides natural air flow and guarantees operating at high ambient temperatures.

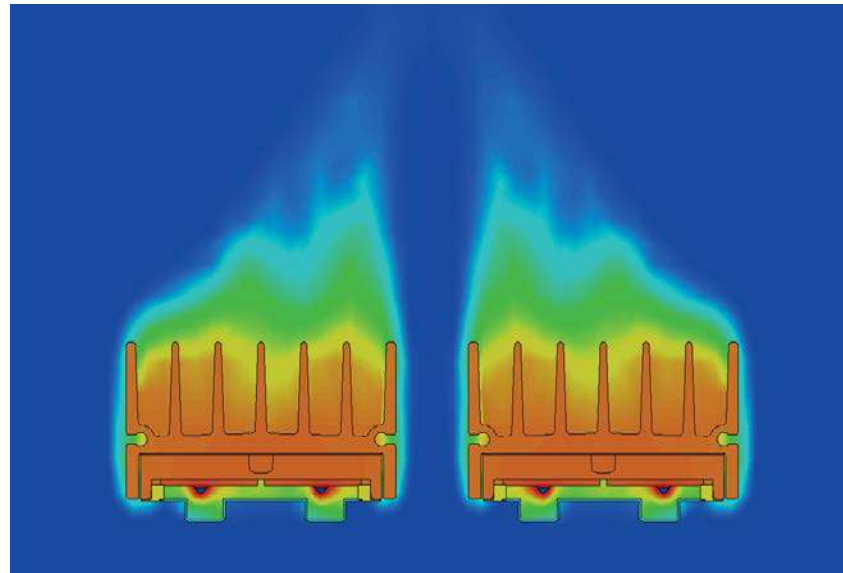


MODULARITY

One luminaire type TANGRAM HB features 2/4/6/8 prefabricated modules containing LED-s, optics and cooling part. This approach enables the whole area to be illuminated in the desired way, with only one luminaire model, regardless of the size of the production hall, warehouse, sports terrain, street intersection.



	DIMENSIONS A/B/H	LED LUMEN (4000K/CRI 70)	TOTAL POWER (W)	NUMBER OF LEDS	WEIGHT
TANGRAM HB2	360/340/95	9800	70	32	5.5
TANGRAM HB4	540/340/85	19600	140	64	7.5
TANGRAM HB6	755/340/85	29400	210	96	10
TANGRAM HB8	545/595/85	39200	279	128	14

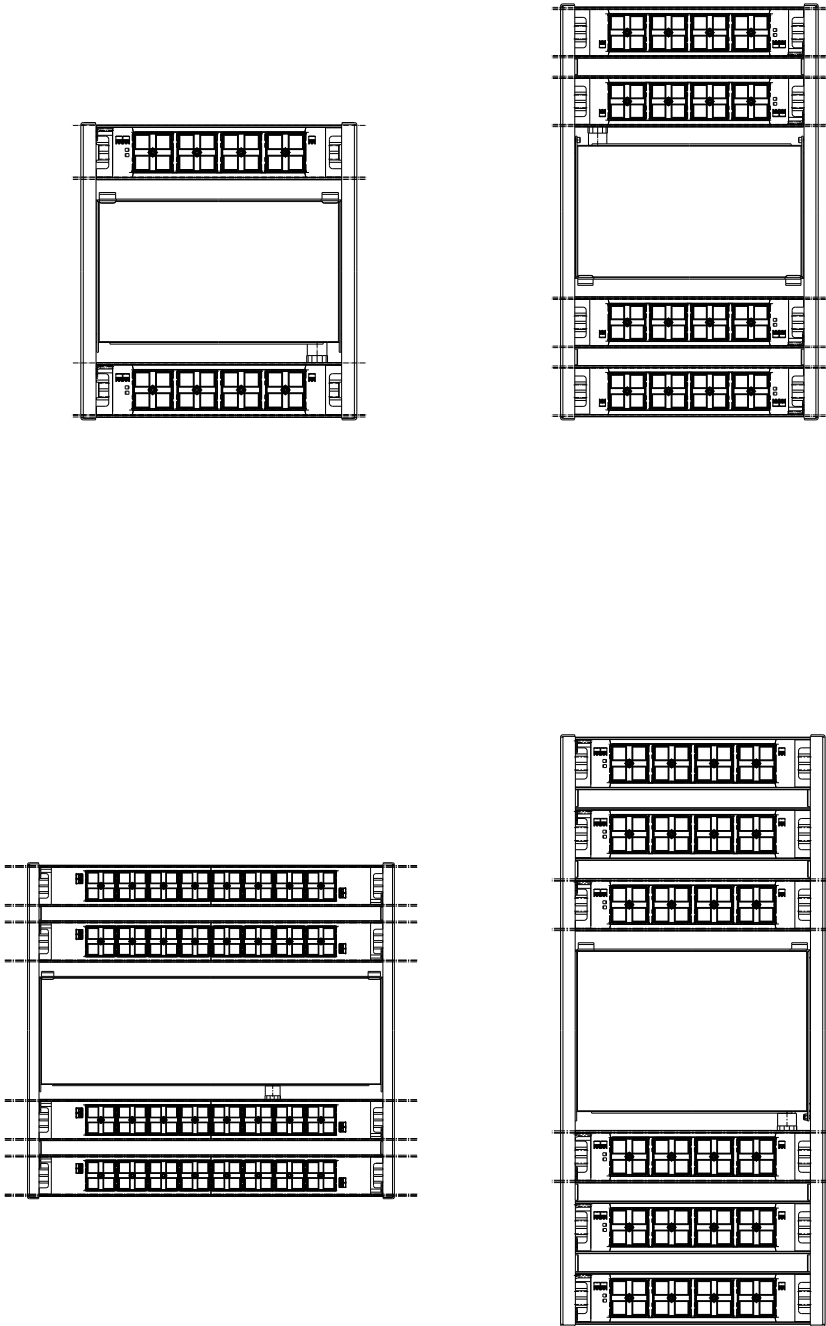

## OPTICS

PMMA lenses of high light transmission (95%). Vast range of different powers and lenses cater for wide application in all types of outdoor illumination.

The distribution of light is defined by lenses made of optical grade PMMA with high UV and temperature conditions. These lenses allow better targeting of light rays so that the light scattering to adjacent buildings and light pollution is minimized. Numerous light distribution are available due to use of standardized lenses. The lighting requirements that may occur in indoor and outdoor spaces such as roads, pedestrian zones, parking lots, squares, sports lighting, industrial high bay and open areas, facades can be met by choosing appropriate light distribution. The main advantage is that lamp Tangram HB has range of 40 different types of optics.



9800 lm  
to  
39200 lm

PMMA LENSES  
95% LOR









APPLICATION / USE

ROUNDAABOUT

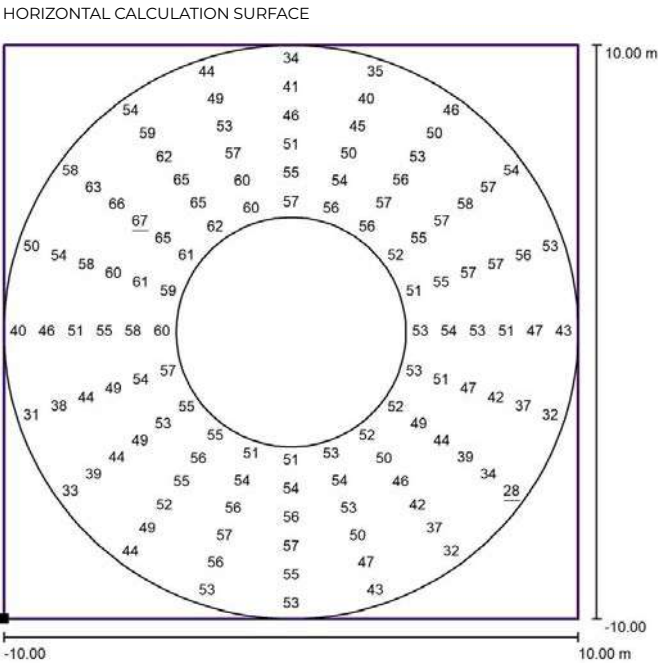

Values in Lux, Scale 1 : 161

Position of surface in external scene:  
Marked point: (14.014 m, 13.512 m,  
0.000 m)




Grid: 20 x 6 Points

$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$	$E_{min} / E_{max}$
51	28	67	0.55	0.42

APPLICATION

The use of the Tangram HB6 luminaire with elliptical optics particularly emphasizes illumination of the roundabout, leaving the island non illuminated. Mounting height 12m, 1.5 m triple arm, angle of installation 5 °. The calculation results are in accordance with the standard EN 13201-2 for the C0 ( $E_{av} > 50lx$ ,  $u_0 > 0.4$ ) illumination class.






APPLICATION / USE

INDUSTRY, INDOOR-HIGH-BAY WAREHOUSE

HORIZONTAL CALCULATION SURFACE

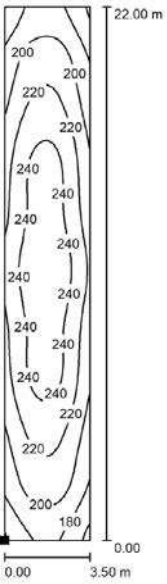


Position of surface in room:  
Marked point:  
(-5.720 m, -11.093 m, 0.000 m)



Grid: 16 x 64 Points

$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u0$	$E_{min} / E_{max}$
219	155	255	0.710	0.610

VERTICAL CALCULATION SURFACE

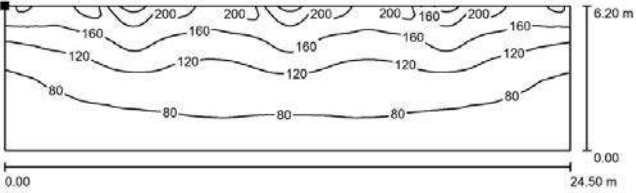

Position of surface in room:  
Marked point:  
(-5.510 m, -12.300 m, 7.300 m)




Grid: 32 x 128 Points

$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u0$	$E_{min} / E_{max}$
111	45	220	0.407	0.205

Values in Lux, Scale 1 : 173

APPLICATION

When illuminating the spaces between high bay racks in warehouses, the floodlight TANGRAM HB6 with elliptical optics (B2) provides the required illumination level in the passage and on vertical plane of high bay racks. Mounting height 10m, distance between the racks 3.5m, lengths 22m are illuminated with three suspended floodlights. The results of the calculations are in accordance with the standard EN12464-1 for illumination class 5.4.1 ( $E_{av}>100lx/200lx$ ,  $u0>0.4$ ).






APPLICATION / USE



INDUSTRY, INDOOR - OPEN SPACE WAREHOUSE

HORIZONTAL CALCULATION PLANE

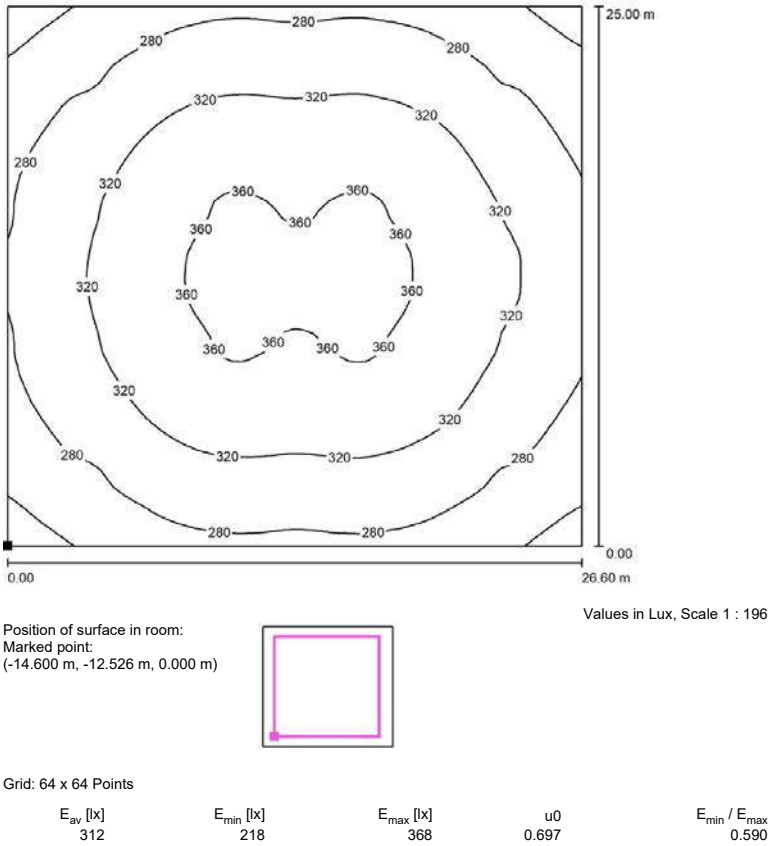

APPLICATION


When illuminating packing spaces in warehouses, the floodlight TANGRAM HB4 with wide beam square optics (CY) provides the required illumination level, uniformly illuminating the whole surface. Mounting height 10m, dimensions and disposition as shown, provide the results of calculation in accordance with the standard EN12464-1 for illumination class 5.4.2 ( $E_{av}>300lx/200lx$ ,  $u0>0.6$ ).

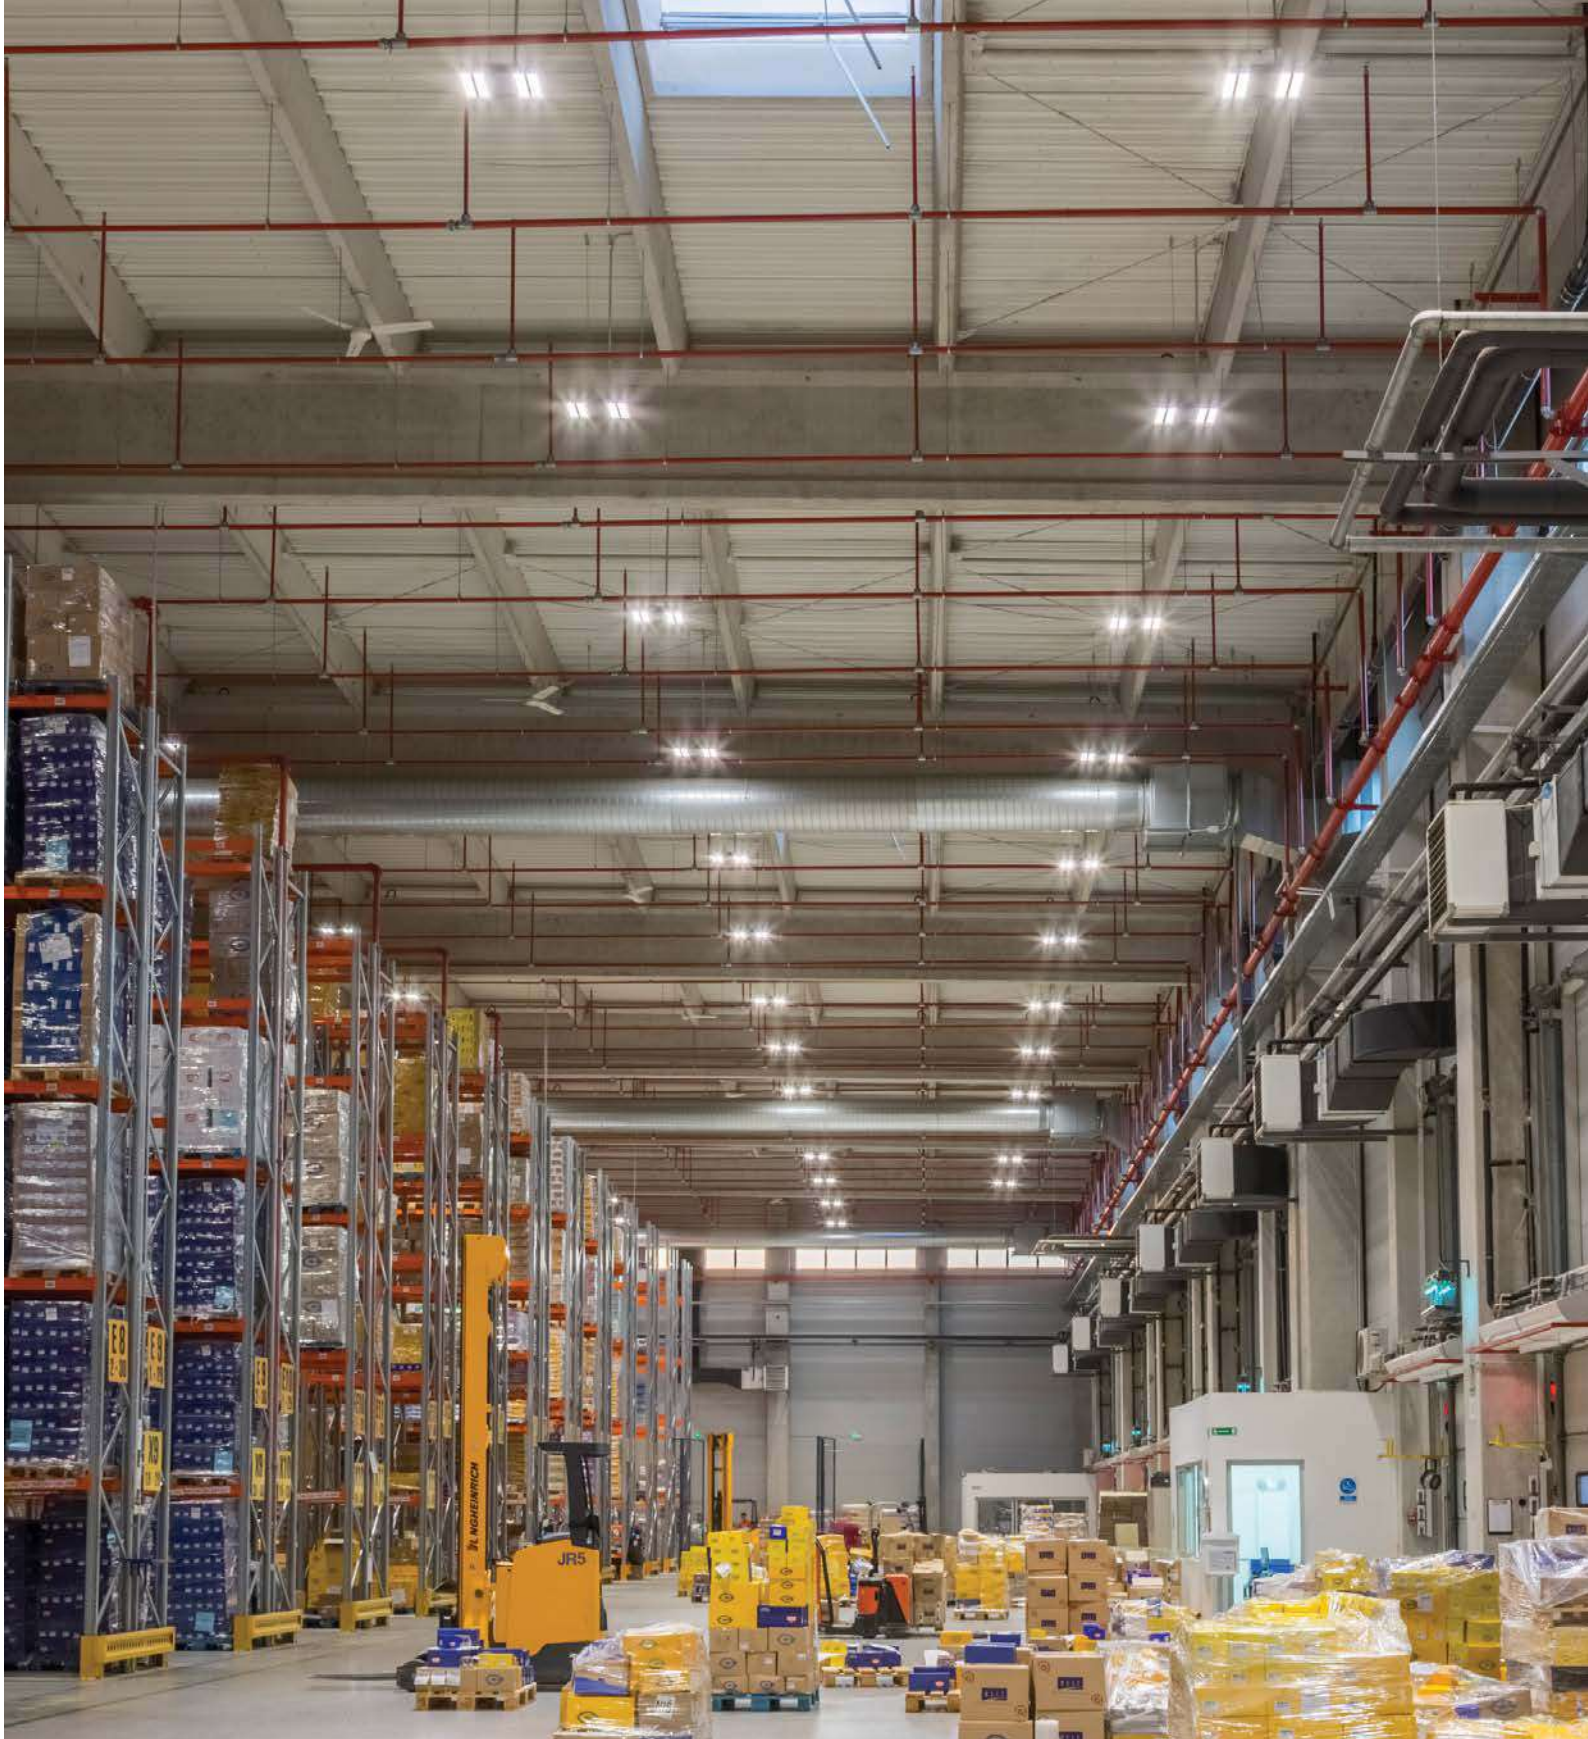





APPLICATION / USE

INDUSTRY, OUTDOOR STORAGE SPACE

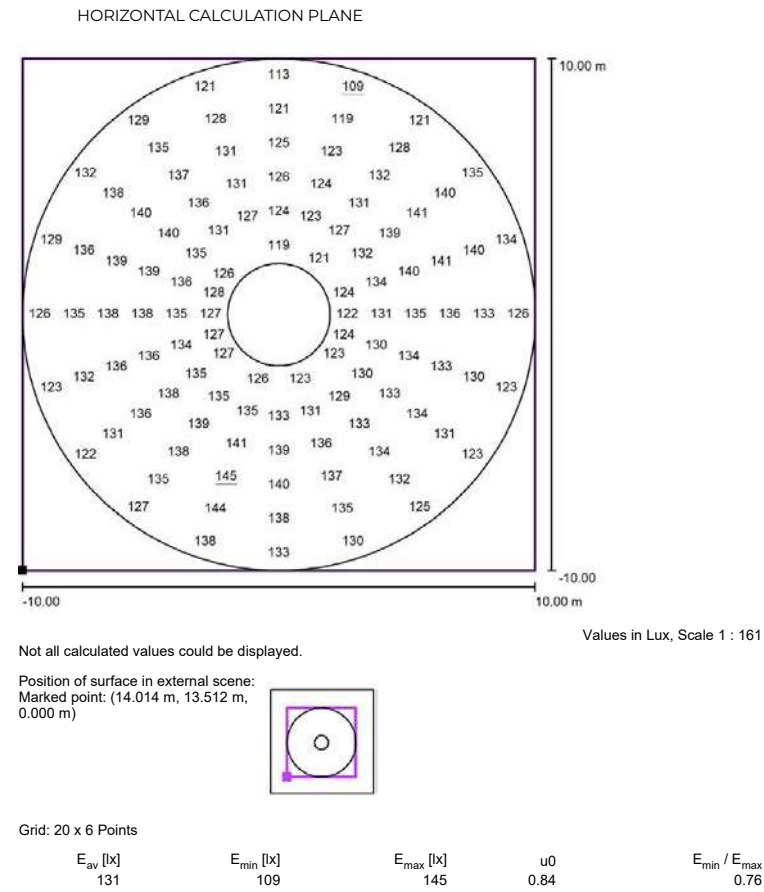

APPLICATION

When illuminating outdoor warehouses, TANGRAM HB6/F with elliptical optics (O) provides the required illumination level in wide diameter (20m) from the mast. With mounting height of 30m and 10 pieces of floodlight on a circular carrier, the obtained results are in accordance with the standard EN12464-2 for illumination class 5.7.3 ( $E_{av}>100lx$ ,  $u0>0.5$ ).

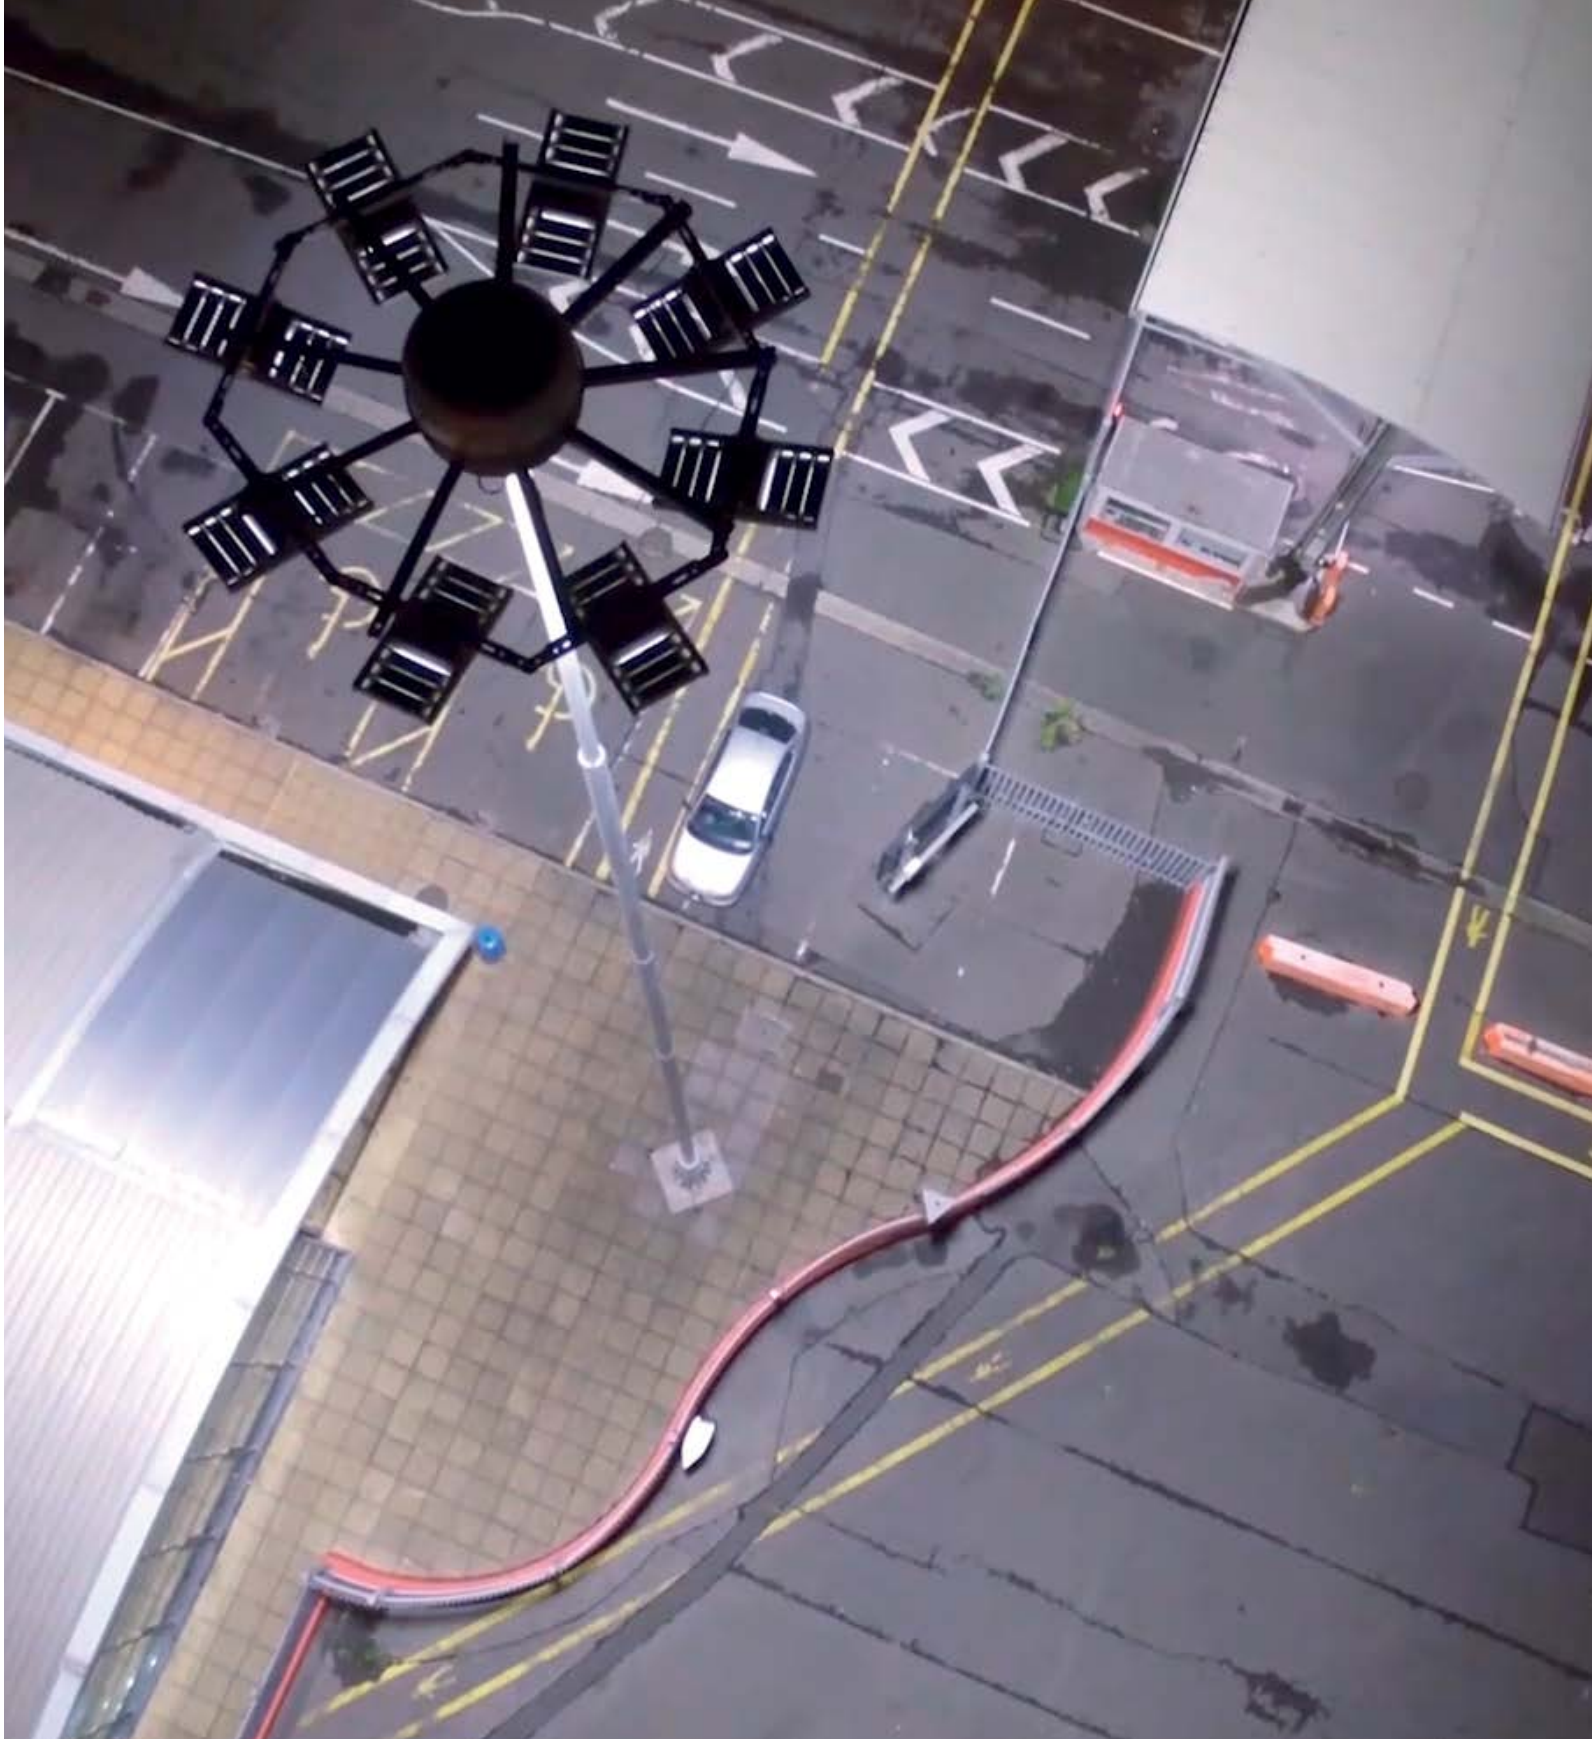




APPLICATION / USE

ST GEORGE CHURCH

VERTICAL CALCULATION SURFACES

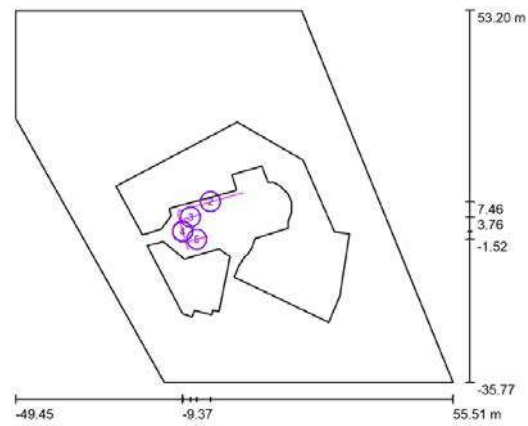

Scale 1 : 1013

Calculation Surface List


No.	Designation	Type	Grid	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u0$	$E_{min} / E_{max}$
1	PREDNJA FASADA	perpendicular	128 x 128	85	42	108	0.494	0.388
2	BOCNI ZIDOVI 1 i 2	perpendicular	128 x 128	75	41	91	0.543	0.450
3	BOCNO KULA 2	perpendicular	128 x 128	61	44	68	0.716	0.642
4	PREDNJA KULA	perpendicular	128 x 128	88	56	128	0.641	0.441
5	BOCNO KULE 1 i 2	perpendicular	128 x 128	62	36	76	0.584	0.471

Summary of Results


Type	Quantity	Average [lx]	Min [lx]	Max [lx]	$u0$	$E_{min} / E_{max}$
perpendicular	5	75	36	128	0.48	0.28

APPLICATION

When illuminating facades, the floodlights TANGRAM are put to good use in distant point illumination from the pole towards wide surfaces. In this case, five floodlights TANGRAM HB4 with medium beam symmetric optics (RW) uniformly illuminate the whole facade from 20m distance, mounted on 1.5m poles.



TECHNICAL DATA

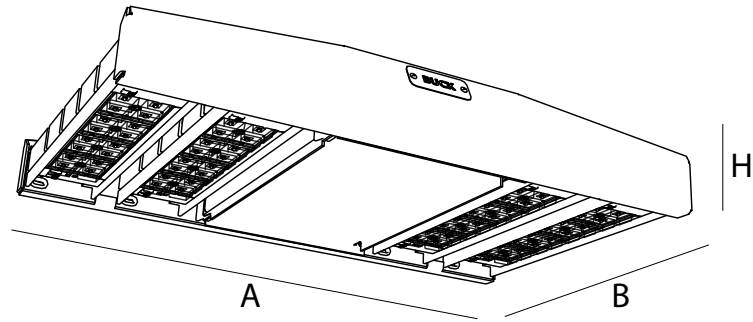

Ingressprotection rating	IP66
Finish	black, gray
Ta	≤55°C
Led source	2x8LED modul
LED service life	>100 000h(L90B10)
Lens LOR	95%
Luminaire luminous flux	9800 - 39200lm
Total power	140W
Luminaire efficiency	138-142lm/W
Light coulor temperature	4000K opt 2700K 3000K 5700K 6500K
CRI	70 opt 80
Power supply	220-240VAC (198=264V) 50 60Hz
Constant current range	700mA 1050mA (700mA nominal)
Control gear	NFC ECG, DIMM 1-10 opt DALI, DMX R2M

The housing is made of combination of marine grade aluminium sheet and extruded aluminium profile. Other mechanical parts are made of saineless steel. Finish is epoxy polyester powder coating.

Optional - Conversion coating for extremely aggressive corrosive envi-ronments and environments with increased salinity.

LED modules are compliant with Zagha standard.

Luminaire is equipped with plug-in connector for easy connection  
Optional - terminal for connection to voltage IP66.


Surface or suspension mounting.

TANGRAM HB



Different types of mounting kit  
to be ordered separately

MOUNTING ACCESSORIES

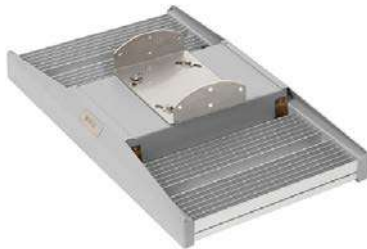

S KIT  
For suspension mounting



CT KIT  
For catenary mounting



C KIT  
For ceiling mounting




W KIT  
For wall mounting






TANGRAM HB /R

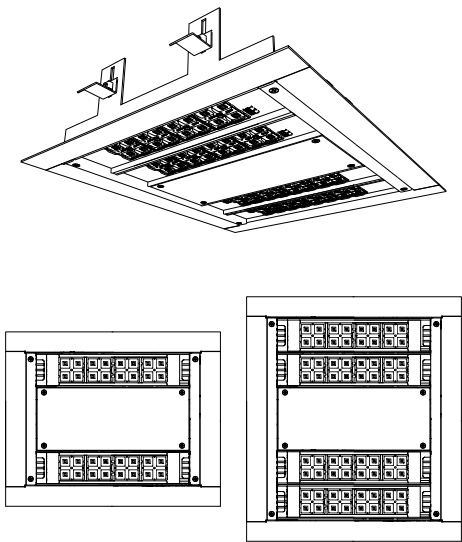

	DIMENSIONS A/B/H	LED LUMEN (4000K/CRI 70)	TOTAL POWER (W)	NUMBER OF LEDS	WEIGHT
TANGRAM HB2/R	320/380/125	9800	140	32	7.5
TANGRAM HB4/R	490/420/125	19600	70	64	9.6

High bay recessed luminaire for illumination of low bay industrial spaces, gas stations and warehouses.

Supplied with mounting frame for lamellar ceiling.

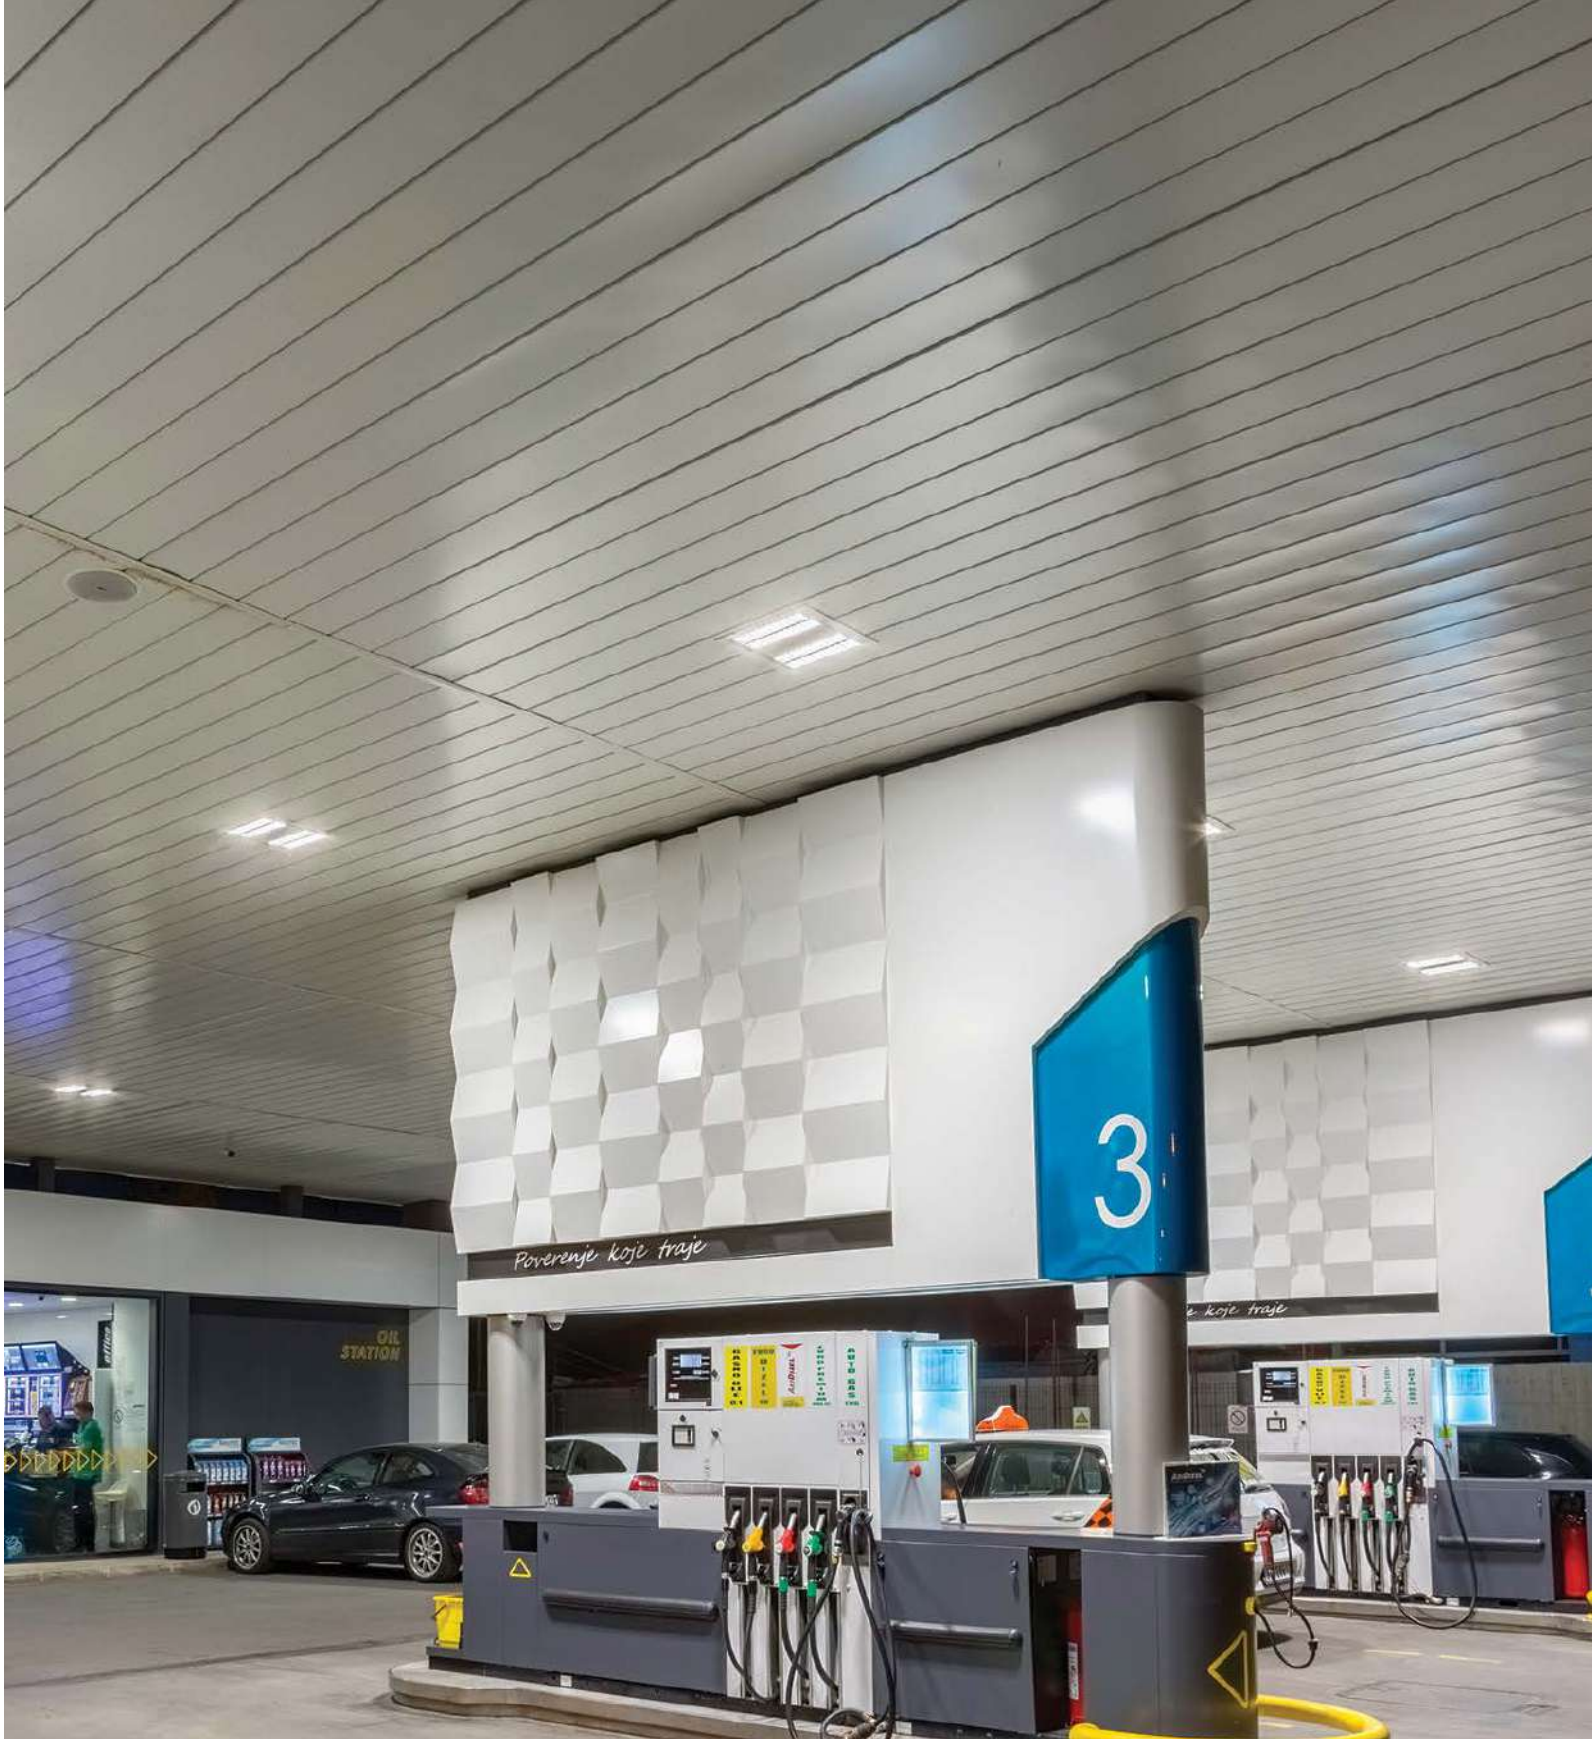


## STANDARD EQUIPMENT

- Wireless interface communication
- Programmable
- AOC - Adjustable Output Current
- CLO - Constant light output
- Autonomous dimming in two steps
- Overvoltage protection 6 kW
- Electronic short-circuit protection
- Overload protection
- Thermal protection
- Voltage range 198—264
- 1-10V analog dimming

## ADDITIONAL EQUIPMENT

- Power line communication
- DALI
- DMX
- Central management
- Autonomous dimming in seven steps
- Life-Indicator - EOL
- Adjustable start time - AST
- Overvoltage protection - 10kV
- Voltage range 170-264VAC
- Thermal protection of drivers and modules

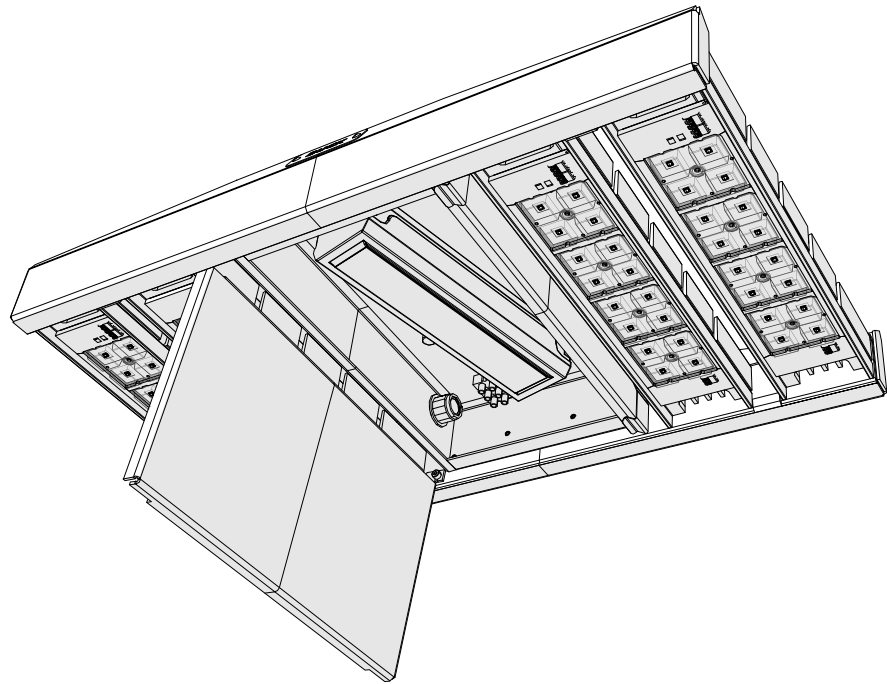

## EASY SERVICEABILITY



## ACCESS TO ELECTRICAL COMPONENTS WITHOUT TOOLS



The luminaire is programmable directly at the mounting site via a wireless interface communicator.



CENTRAL MANAGEMENT SYSTEM

