

SYSTEM S

OFFICE LIGHTING SYSTEM


Continous light lines
High efficiency
Modularity
Tool free installation

BUCK GmbH
Taunustor 1
60310 Frankfurt am Main
office@bucklicht.de
www.bucklicht.de
tel +49.731.950.32.330

Copyright © 2018 BUCK

BUCK
www.buck.lighting




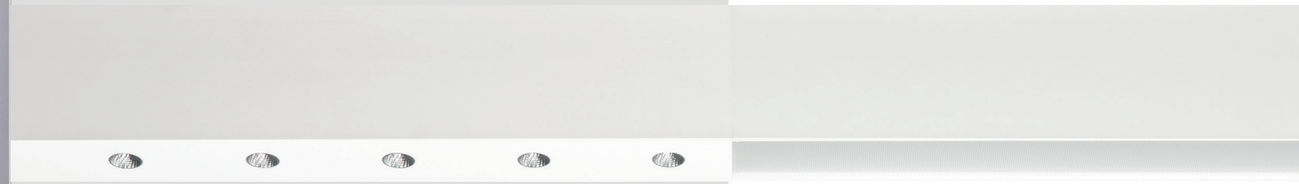


SYSTEM S


Modular system for easy creation of endless light lines. Capacity to work for tens of meters with only one power feed module. Appropriate for open spaces, be it offices or corridors.






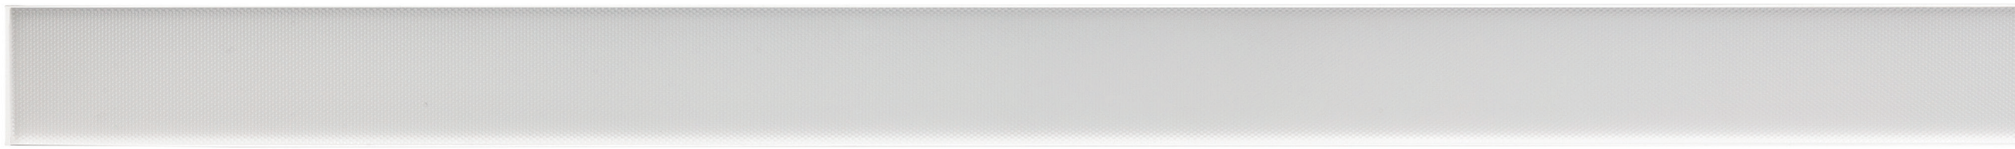



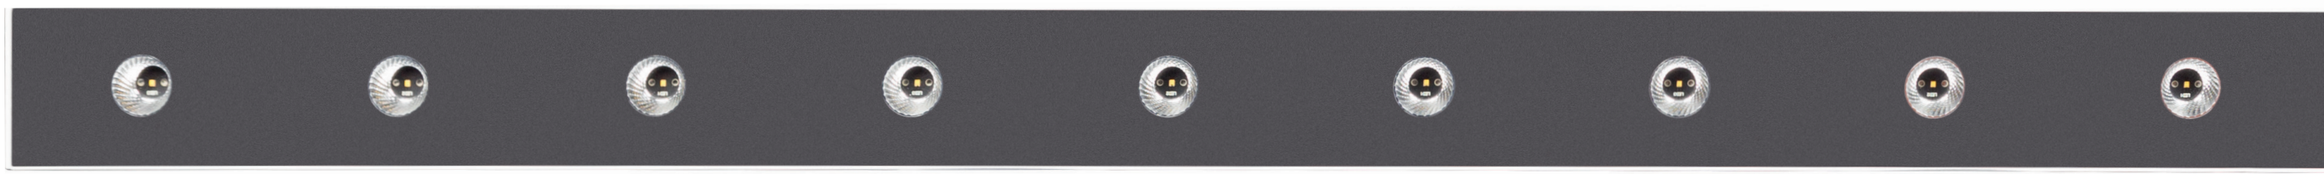

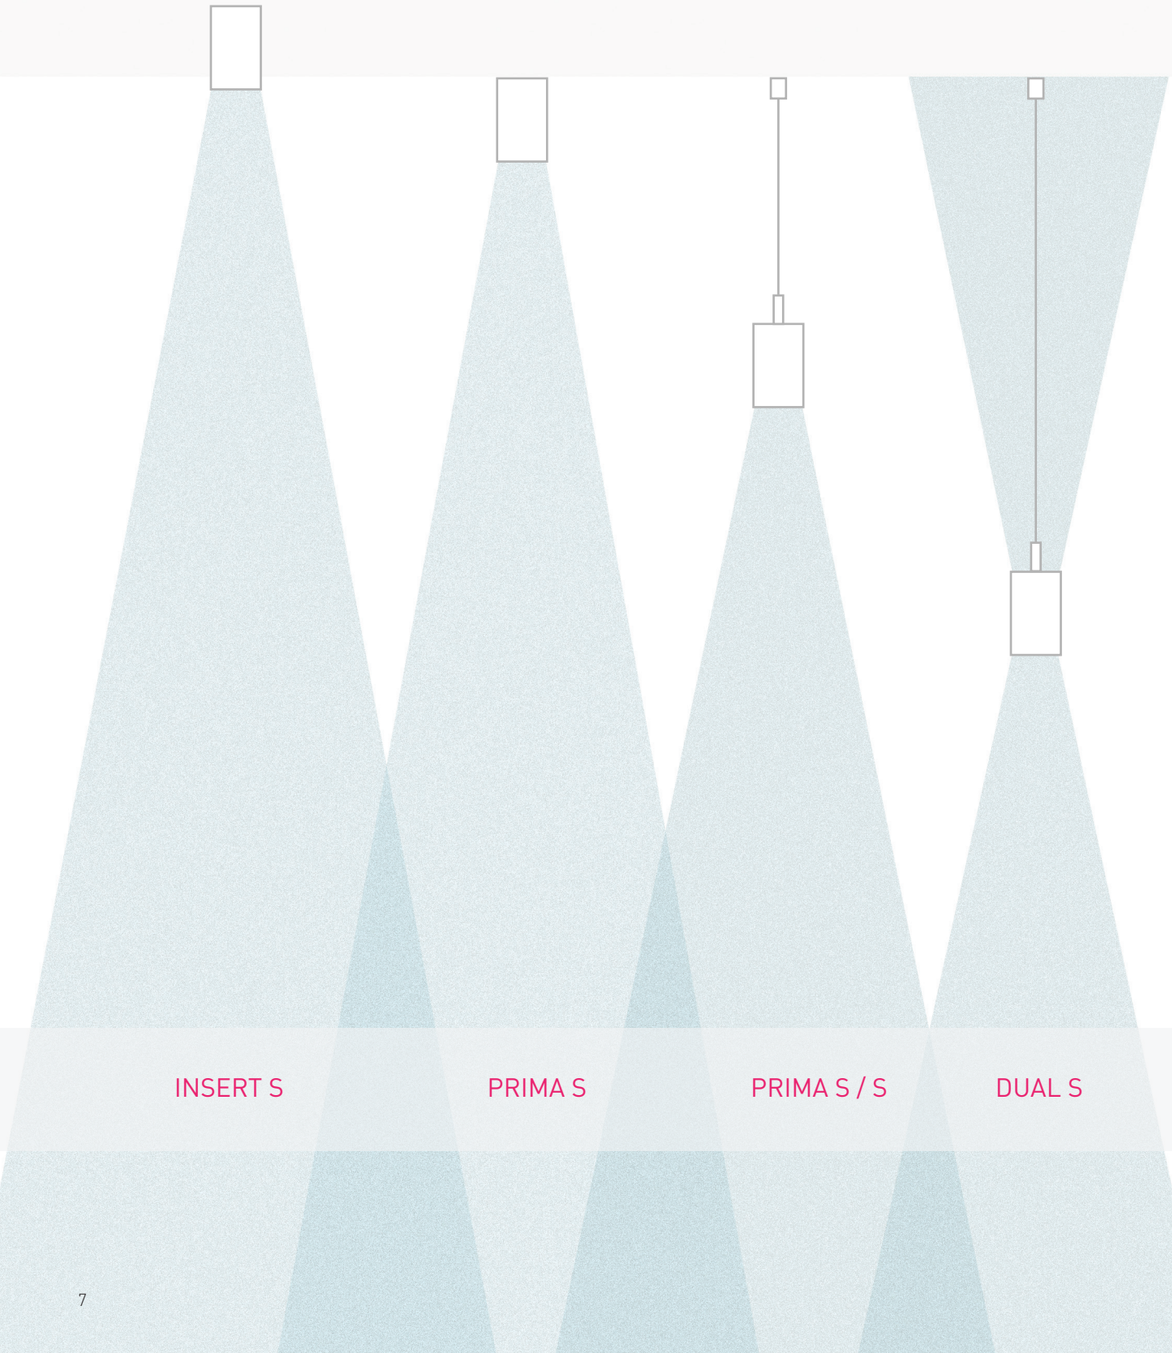

INSERT S

PRIMA S

PRIMA S / S

DUAL S

MOUNTING


INTENDED FOR RECESSED, SURFACE MOUNTED AND SUSPENDED MOUNTING




The light line can integrate several lighting scenes, depending on the particular need or use of the space and its parts.


MODULARITY

Four standard lengths of modules for different optics and blind cover

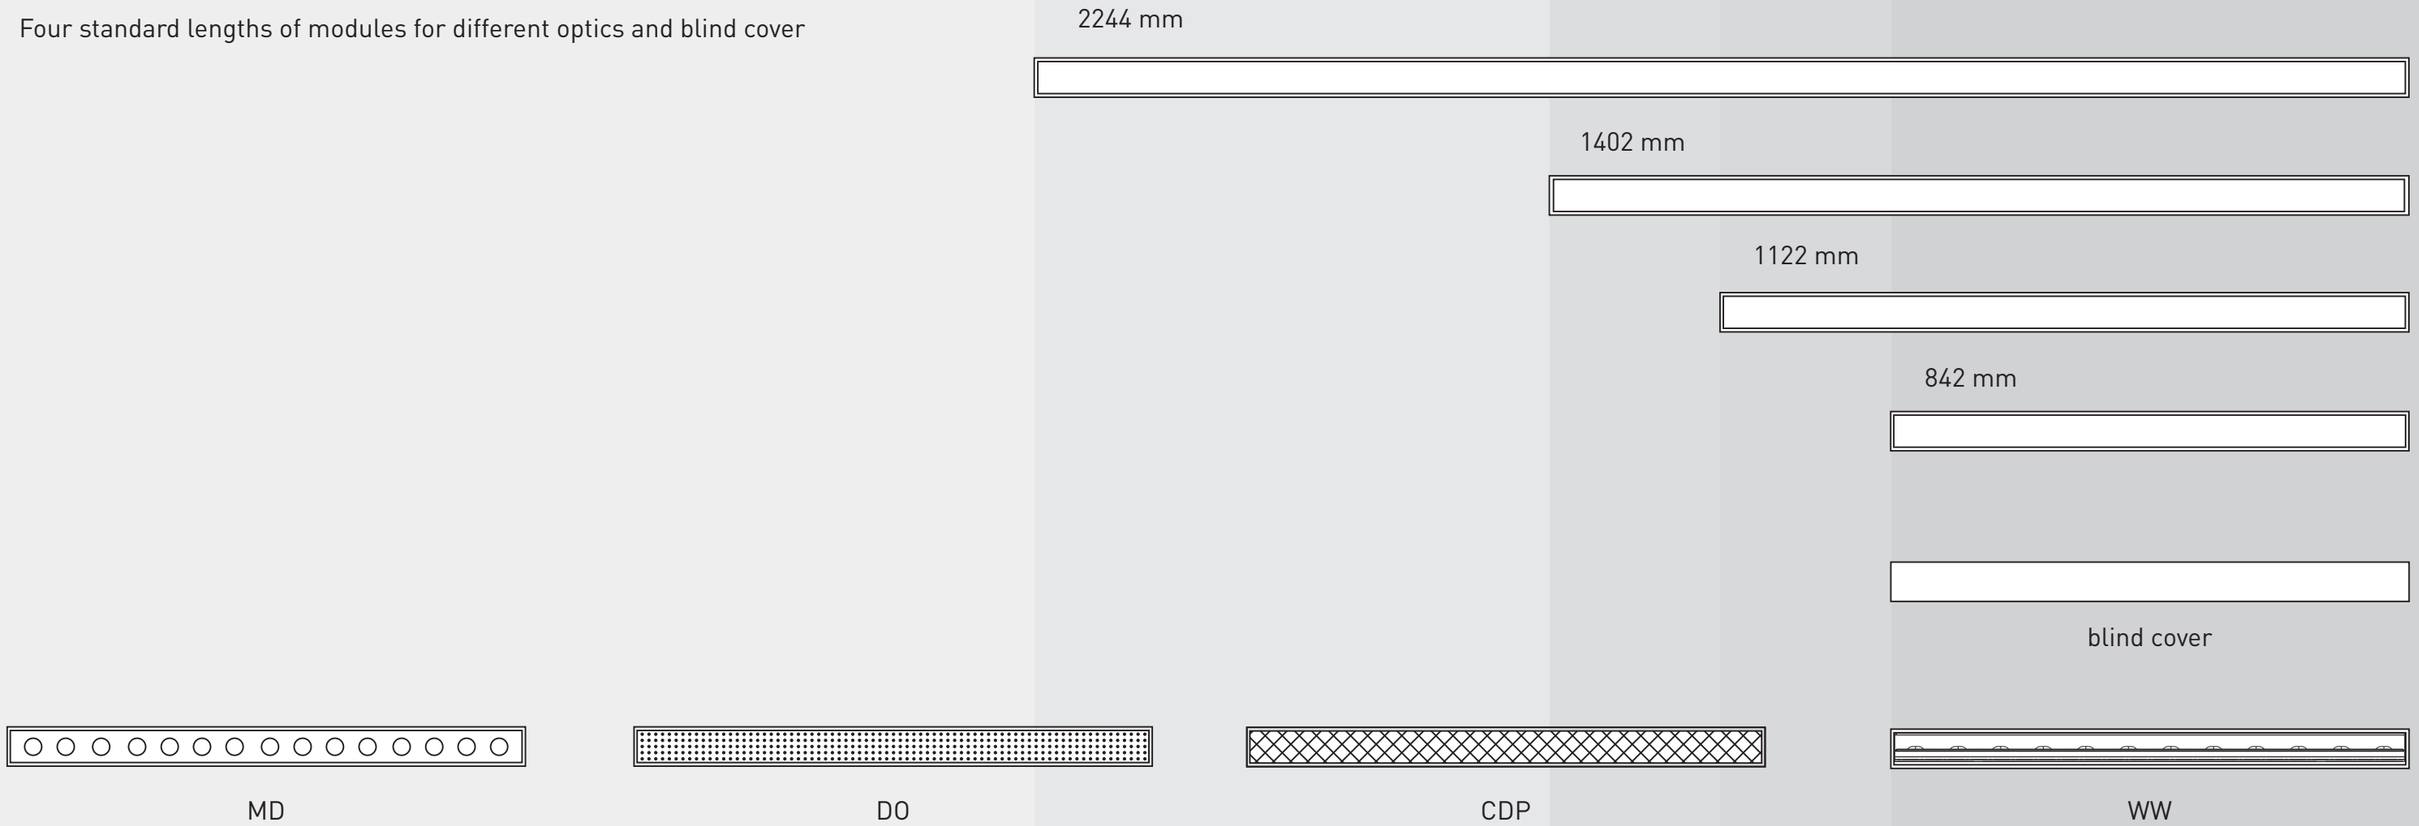


Standard lengths of modules, enabling excellent adaptability to desired lengths of the final light line.

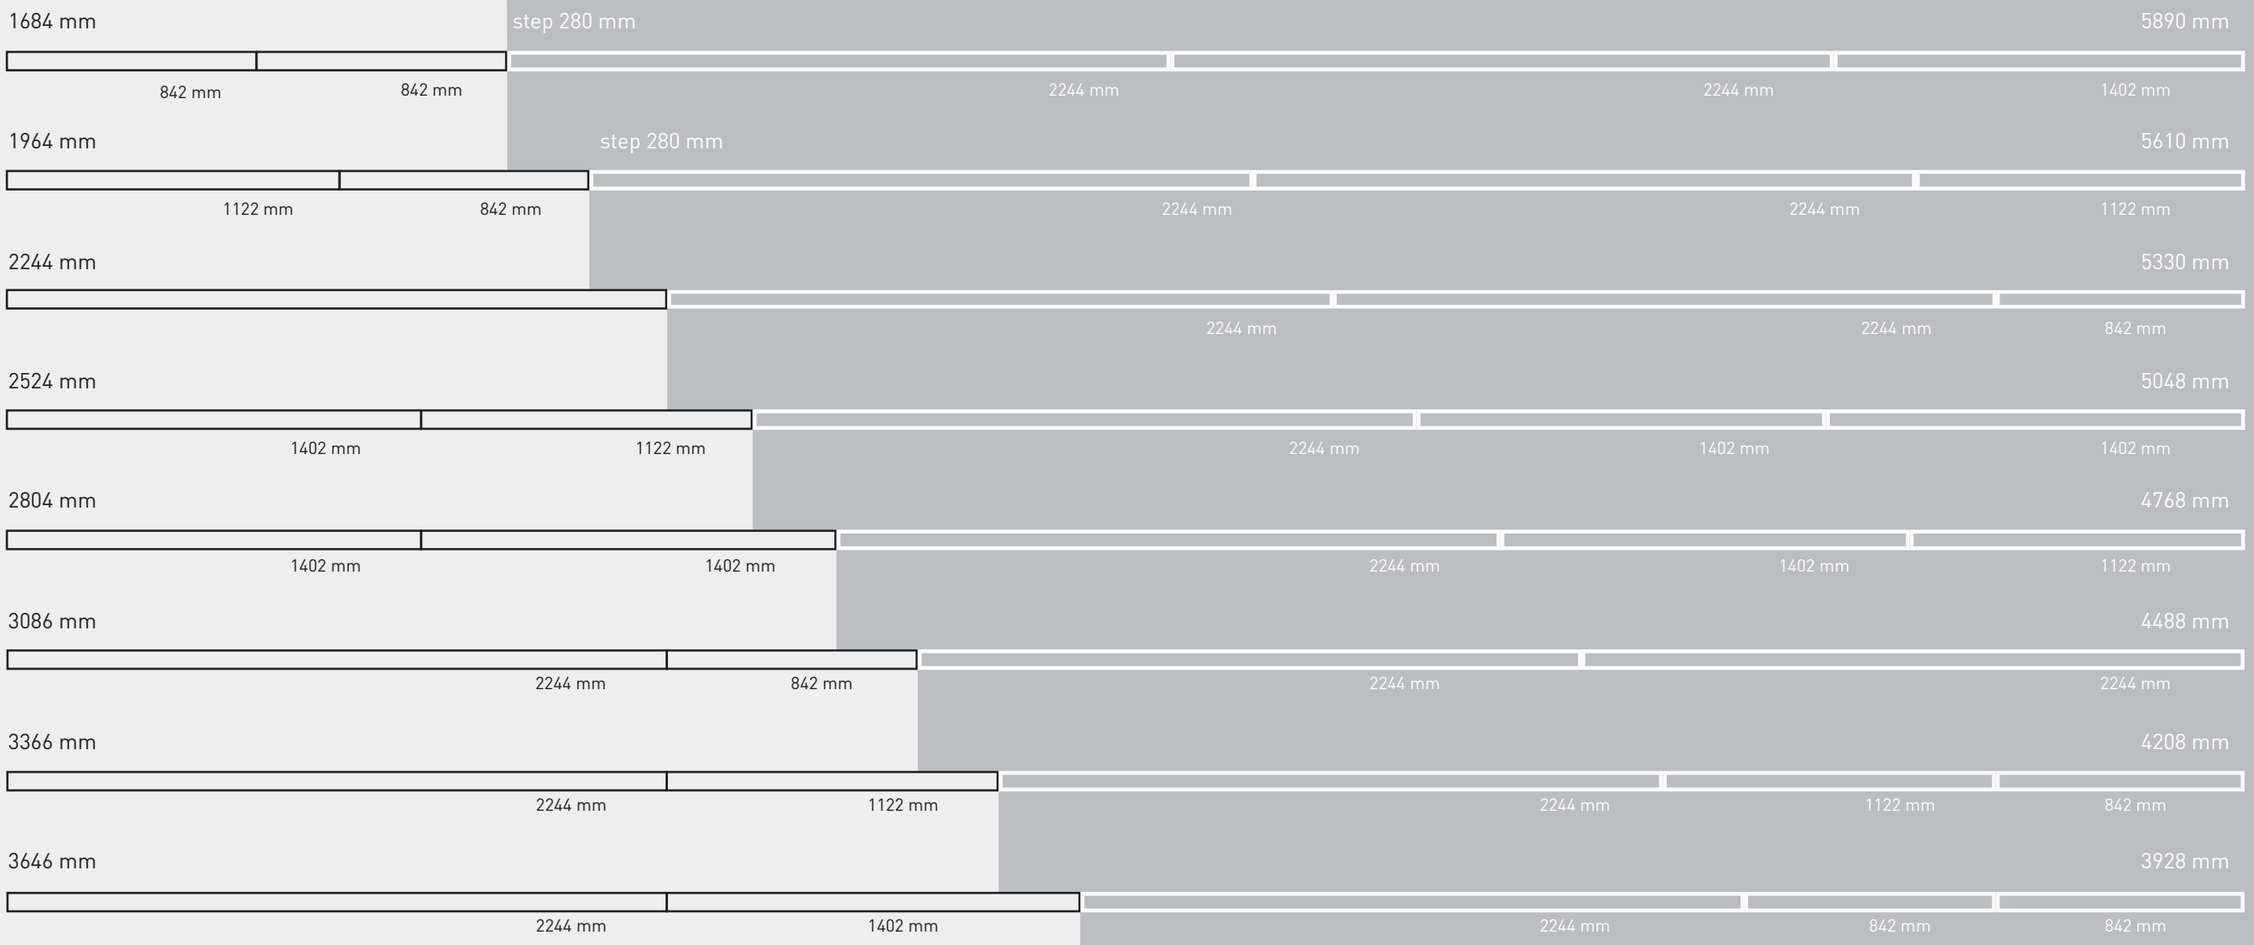

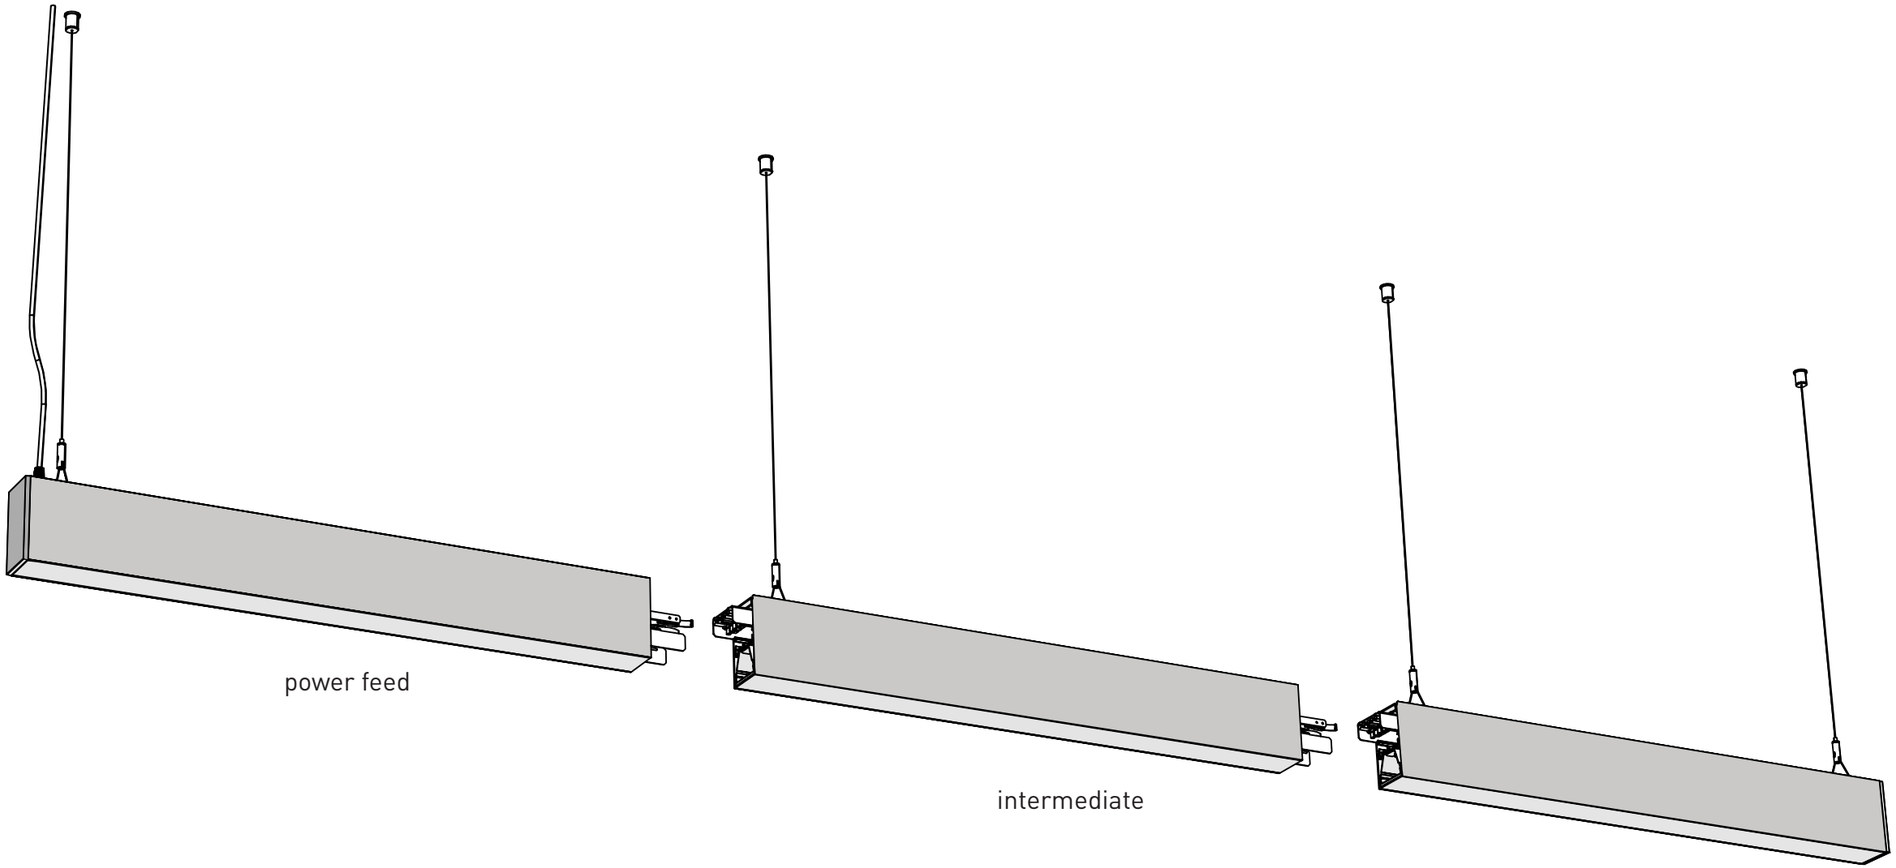

SYSTEM ASSEMBLING

Easy and precise installation and serviceability of LED modules / drivers

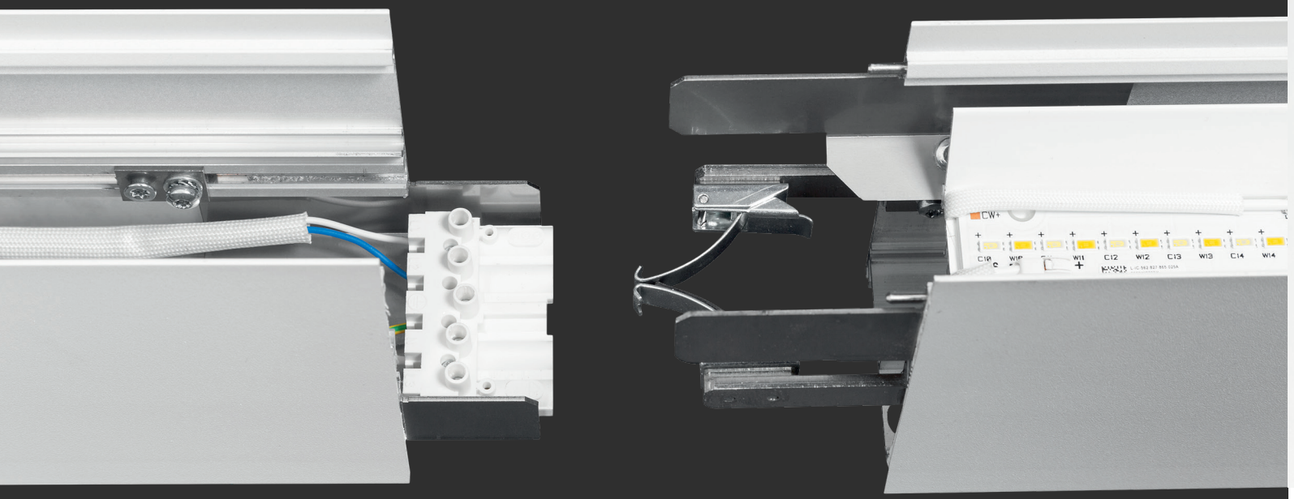

SYSTEM ASSEMBLING

Tool free module connection



Suspension mounting kit



HOUSING / FINISH

- Luminaire of extruded aluminium
- Anodisation in natural aluminium colour or
- Epoxy polyester powder coating, fine structured texture



up to 150lm/W

ENERGY EFFICIENCY

- High efficacy linear system
- Up-to-date generation of LED modules
- ZHAGA compatible LED modules




OPTICS




OPTICS

CDP

Multilayer optics appropriate for office spaces, with UGR < 19.
Highly transparent micro prismatic diffuser provides glare limitation and a uniform diffusing light.
The opal foil provides a uniformly illuminated surface, without visible light sources.



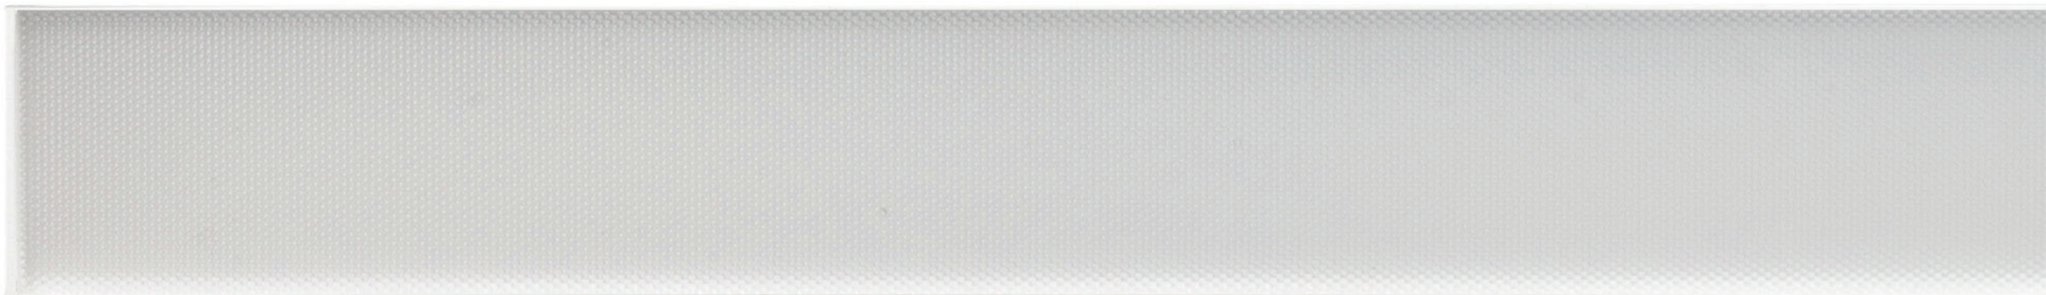


INSERT S CDP & PRIMA S CDP	DIRECT LIGHT
Dimensions A/B/H	846/60/110, 1126/60/110, 1406/60/110, 2248/60/110mm
Luminaire luminous flux [t_a= 25^0]	686 - 5280lm
Total power	7 - 54W
Luminaire efficiency	98lm / W
Light colour temperature	2700K / 4000K
CRI	>80
LED service life	60000h L80B10 / SCDM3
Power supply	220- 240V, 50- 60Hz
Control gear	ECG, DALI


DUAL S CDP	DIRECT/ INDIRECT LIGHT
Dimensions A/B/H	846/60/110, 1126/60/110, 1406/60/110, 2248/60/110mm
Luminaire luminous flux [t_a= 25^0]	2655 - 13620lm
Total power	19 - 108W
Luminaire efficiency	126 - 140lm/W
Light colour temperature	2700K/ 4000K
CRI	>80
LED service life	60000h L80B10/ SCDM3
Power supply	220- 240V, 50- 60Hz
Control gear	ECG, DALI

OPTICS

DO

Optics with wider light beam, appropriate for communication zones and high frequency spaces.
Opal diffuser provides a uniform diffusing light and a uniformly illuminated surface,
without visible light sources.




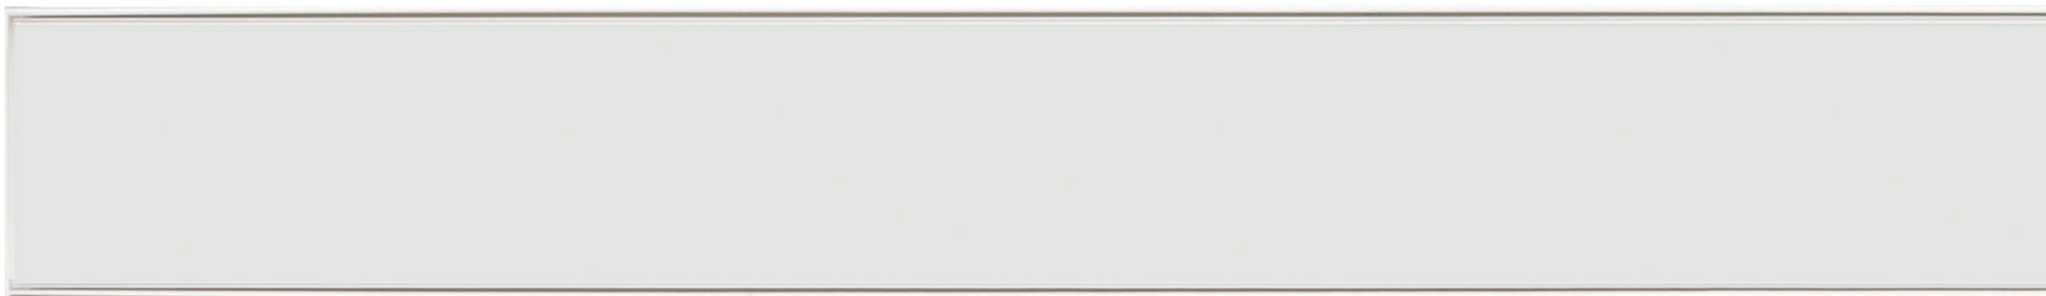


INSERT S DO & PRIMA S DO	DIRECT LIGHT
Dimensions A/B/H	846/60/110, 1126/60/110, 1406/60/110, 2248/60/110mm
Luminaire luminous flux [t_a= 25^0]	616 - 4760lm
Total power	5 - 40W
Luminaire efficiency	119 - 123lm/W
Light colour temperature	2700K / 4000K
CRI	>80
LED service life	60000h L80B10 / SCDM3
Power supply	220 - 240V, 50 - 60Hz
Control gear	ECG, DALI

DUAL S DO	DIRECT/ INDIRECT LIGHT
Dimensions A/B/H	846/60/110, 1126/60/110, 1406/60/110, 2248/60/110mm
Luminaire luminous flux [t_a= 25^0]	2136 - 11002lm
Total power	15 - 80W
Luminaire efficiency	137 - 142lm/W
Light colour temperature	2700K / 4000K
CRI	>80
LED service life	60000h L80B10/ SCDM3
Power supply	220- 240V, 50- 60Hz
Control gear	ECG, DALI


OPTICS



MD 75




MD 55



MD 35

MD


Micro downlight for direct illumination of high energy efficiency. Linear downlight reflectors with complex-surface geometry of micro-facetes allow precise shaping of light beam. Angles of direct light beam and reflected light are almost perfectly aligned, providing sharp cut off for full visual comfort.

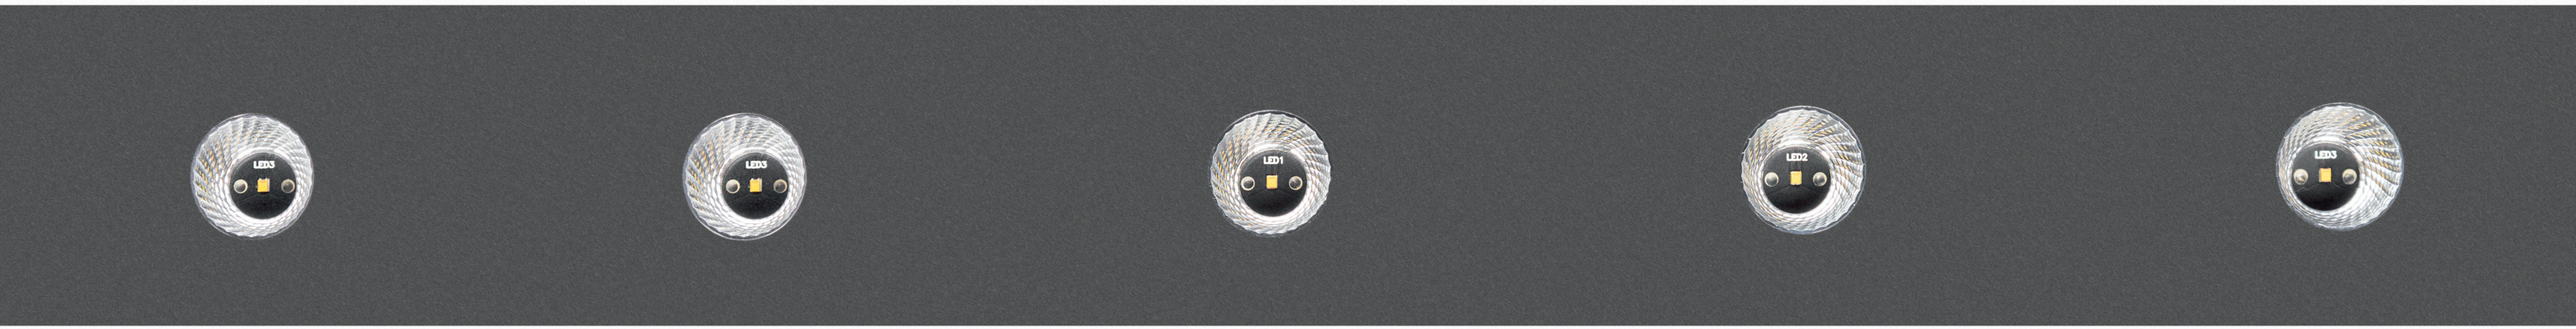

INSERT S MD & PRIMA S MD	DIRECT LIGHT
Dimensions A/B/H	846/60/110, 1126/60/110, 1406/60/110, 2248/60/110mm
Luminaire luminous flux [t_a= 25^0]	1649 - 4889lm
Total power	20 - 53W
Luminaire efficiency	82 - 92lm/W
Light colour temperature	2700K/ 4000K/DyW 2700-5700K
CRI	>90/ >80/ >90
Light beam	35^0 / 55^0 / 75^0
LED service life	50000h L70B10/ SCDM3
Power supply	220- 240V, 50- 60Hz
Control gear	ECG, DALI

DUAL S MD	DIRECT/ INDIRECT LIGHT
Dimensions A/B/H	846/60/110, 1126/60/110, 1406/60/110, 2248/60/110mm
Luminaire luminous flux [t_a= 25^0]	4714 - 13062lm
Total power	42 - 112W
Luminaire efficiency	112 - 116lm/W
Light colour temperature	2700K/ 4000K/DyW 2700-5700K
CRI	>90/ >80/ >90
Light beam	35^0 / 55^0 / 75^0
LED service life	50000h L70B10/ SCDM3
Power supply	220- 240V, 50- 60Hz
Control gear	ECG, DALI

OPTICS



WW

Wall washer for illumination of large wall surfaces. Wall washing component is based on reflectors with micro-facet technology. Reflectors ensure high uniformity of lighting distribution. Precise cut off eliminating glare in adjacent areas.



INSERT S WW & PRIMA S WW	DIRECT LIGHT
Dimensions A/B/H	846/60/110, 1126/60/110, 1406/60/110, 2248/60/110mm
Luminaire luminous flux [t_a= 25^0]	2592lm - 6912lm
Total power	40 - 106W
Luminaire efficiency	65lm/W
Light colour temperature	2700K/ 4000K/DyW 2700-5700K
CRI	>90/ >80/ >90
LED service life	50000h L70B10/ SCDM3
Power supply	220- 240V, 50- 60Hz
Control gear	ECG, DALI

DUAL S WW	DIRECT/ INDIRECT LIGHT
Dimensions A/B/H	846/60/110, 1126/60/110, 1406/60/110, 2248/60/110mm
Luminaire luminous flux [t_a= 25^0]	5656lm - 15084lm
Total power	62 - 166W
Luminaire efficiency	91lm/W
Light colour temperature	2700K/ 4000K/DyW 2700-5700K
CRI	>90/ >80/ >90
LED service life	50000h L70B10 / SCDM3
Power supply	220- 240V, 50- 60Hz
Control gear	ECG, DALI

