



ARIA SMART

FREE-STANDING LUMINAIRE

High efficiency
Quick assembly
Easy serviceability

BUCK GmbH

Taunustor 1
60310 Frankfurt am Main
office@bucklicht.de
www.bucklicht.de
tel +49.731.950.32.330
fax +49.731.950.32.332

Copyright © 2018 BUCK, edition: 5

BUCK
www.buck.lighting



Free standing luminaire for direct and indirect illumination of work spaces. The indirect component provides general illumination, while the direct one provides local illumination in the working zone.

Direct components 40%, indirect components 60%.
Symmetric light distribution.



EFFICIENCY

Versatile luminaire: solution for open space offices.
General lighting and appropriate distribution of light on working plane.



LIGHTING COMFORT

Visual comfort ensured with the up to date optical and electrical components.

OPTICS for the direct light component: highly transparent microprismatic diffuser with opal foil enabling glare limitation and a uniform diffusing light, according to EN 12464, $UGR < 15$ ($x=4H$ $y=8H$ $S=0.25H$), illuminance $L_{65} < 3000 \text{cd/m}^2$.

Optics for indirect light component is transparent diffuser.
High light output level, with abundant direct light.

UGR<15



LIGHTING MANAGEMENT

Electronic equipment allows consumer friendly use, with enabling light and presence control.

MOTION DETECTOR automatically activates/deactivates luminaire or switches it off during period of absence.

LIGHT SENSOR Light sensor regularly measures illuminance level. Depending on surrounding natural or artificial light, the light intensity is adjusted to the predefined range.

TOUCH DIMM manual regulation of light intensity by button press. Easy access to switch / button for controlling light independent of the height of furniture and equipment.

SMART automatic regulation of light intensity via SMART Sensor stand by regime <0,6W/h.

REMOTE CONTROL IR-SMART Controller / basic DIM ILD Programmer (on request).



IR-SMART CONTROLLER

- Optional infra-red programming unit for basicDIM ILD,
- Defining of discrete parameter values,
- Programmable functions such as light level, time delay, brightness and presence sensor.


TOUCH DIMM manual regulation of light intensity by button press.
Press to change the intensity, double click to set the desired light level.




LIGHT SENSOR with motion detector
for light management systems

ENERGY SAVINGS

Considerable energy savings depending on desired illumination level.
When dimming below 80% luminance is $L_{65} < 3000 \text{ cd/m}^2$.

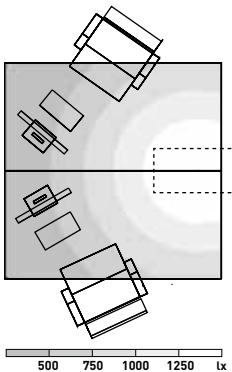


1000lx
Room hight 2.90m
Task area illumination $E_{av} = 1000 \text{ lx}$
Power consumption 95.0W

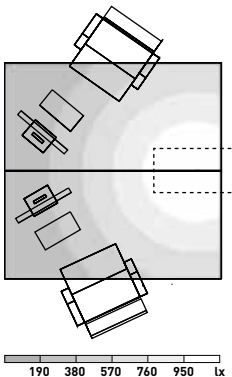

750lx dim light 75%
Room hight 2.90m
Task area illumination $E_{av} = 750 \text{ lx}$
Power consumption 71.0W

$L_{65} < 3000$
 cd/m^2

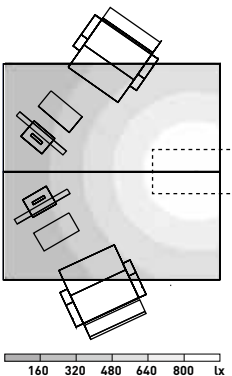

500lx dim light 50%
Room hight 2.90m
Task area illumination $E_{av} = 500 \text{ lx}$
Power consumption 48.0W


$L_{65} < 3000$
 cd/m^2





ADAPTABILITY

Adaptable to different space geometrics and workplace modifications.

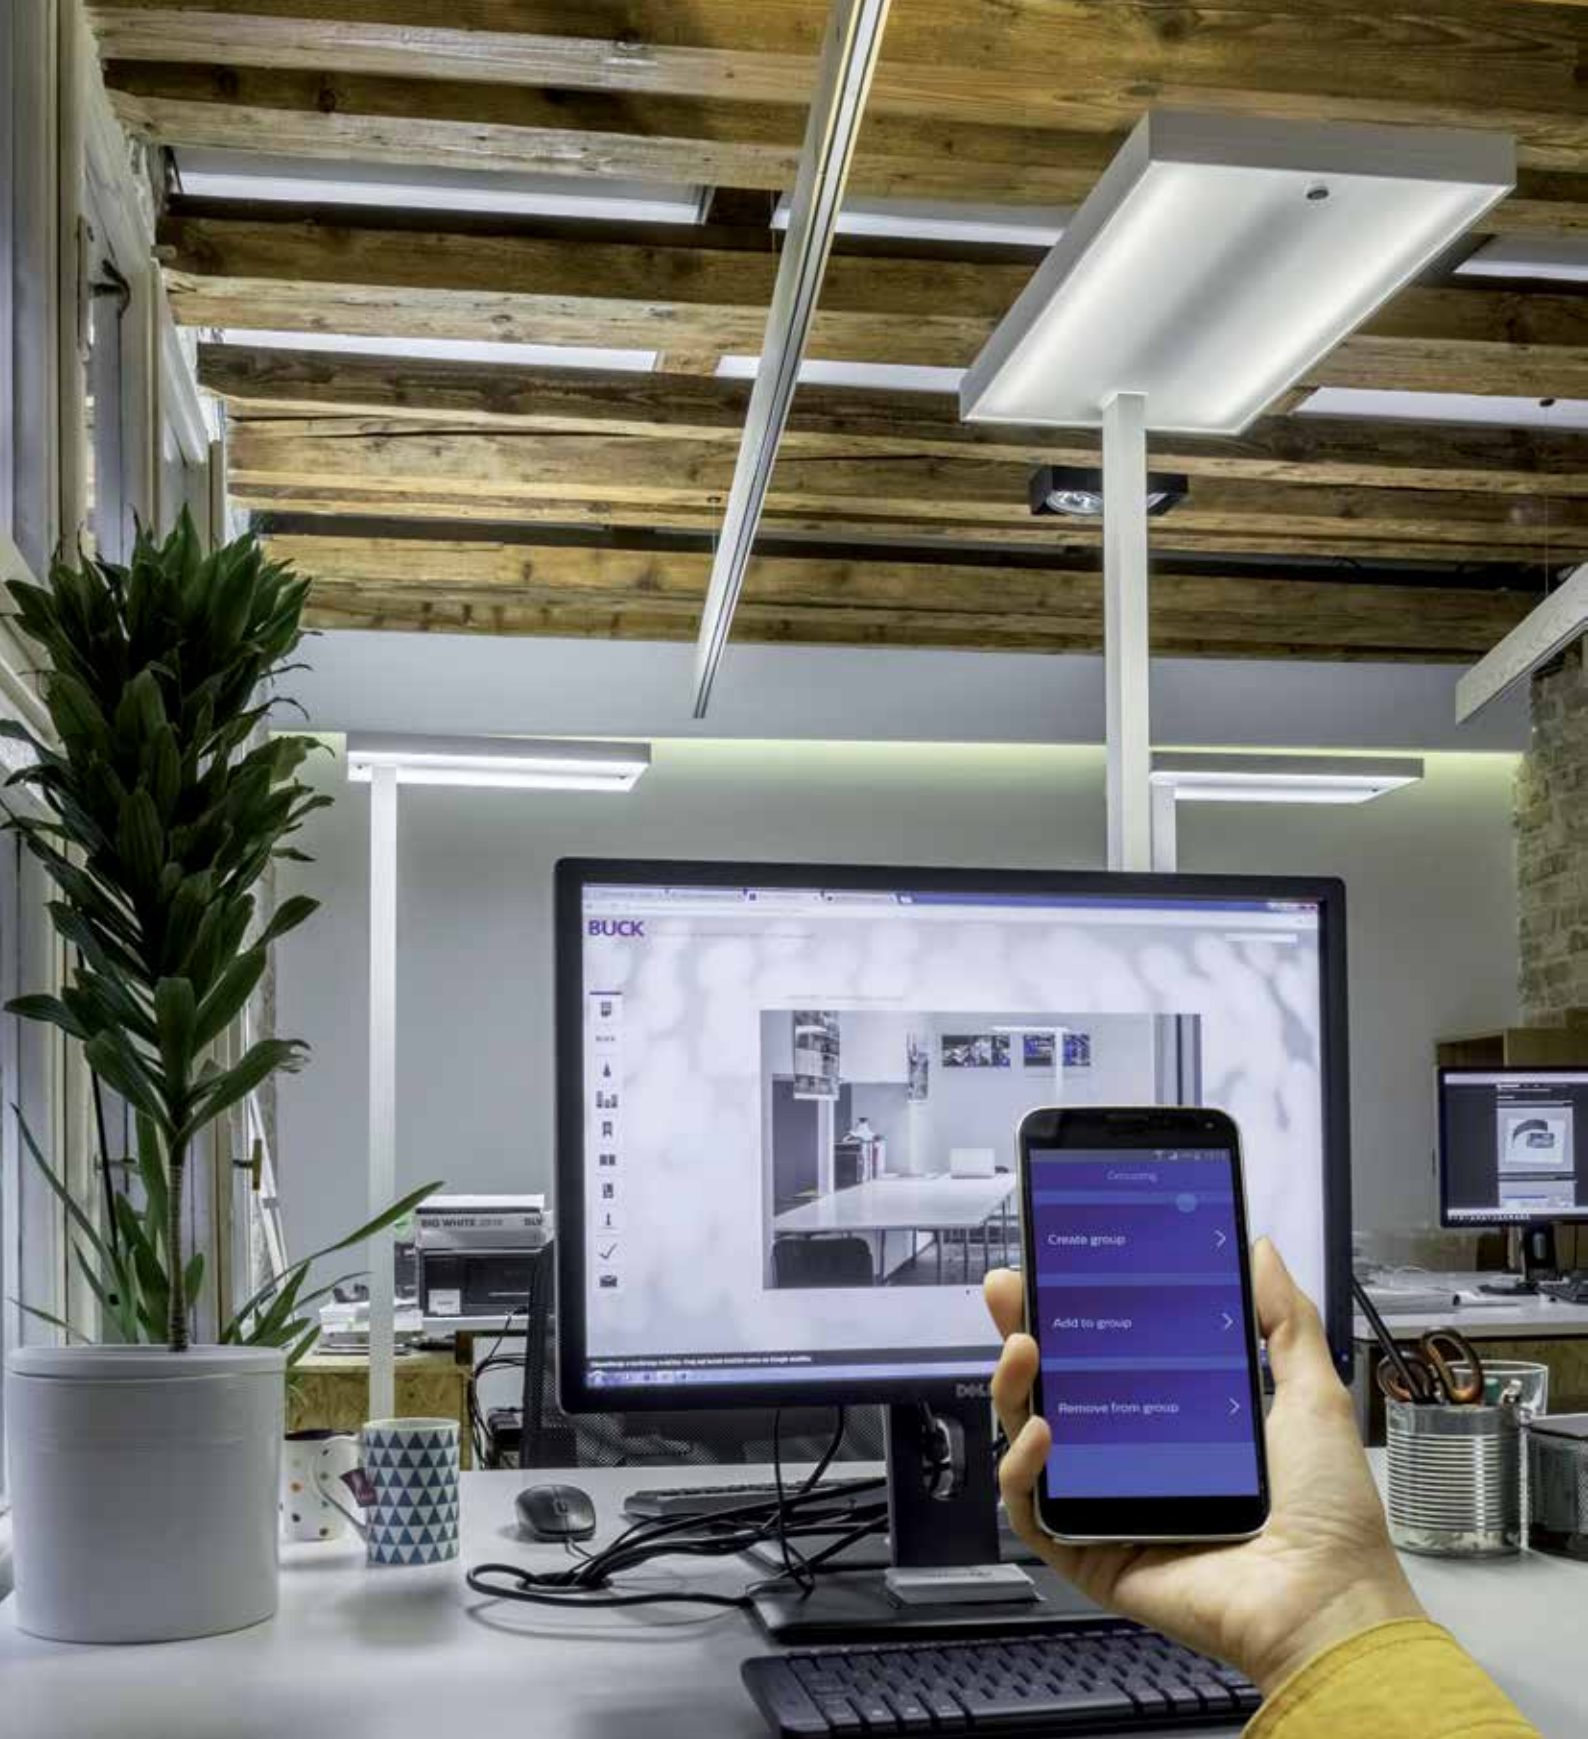

ARIA SMART GROUP

Aria Smart Group combines occupancy sensing, daylight harvesting and task tuning with advanced grouping features. It enables groups of sensors to work together and communicate with each other without additional wiring.

Offices, meeting rooms, corridors and open-plan spaces can benefit from increased energy saving and further enhanced positive impact on user well-being.

WIRELESS GROUP CONNECTIVITY

Luminaires with smart sensors are easily grouped and programmed using mobile phone application (Android or iOS), which offers immense flexibility to organize luminaires into groups.

WIRELESS
GROUP CONNECTIVITY





SCENE SETTING WITH WIRELESS SWITCHES

OCCUPANCY SHARING | Zones with detected motion are illuminated to full task level, while sub-zones are maintained at pleasant, background light level. This results in higher visual comfort and a better working atmosphere.

PRESENTATION MODE FOR A CONFERENCE ROOM | Set light level low near the screen, while keeping higher level in the back of the room.

TEHNICAL DATA

color:

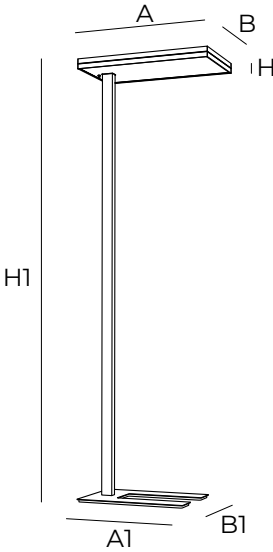

| | |
|---|--------------------------------------|
| Dimensions A/A1/B/B1/H/H1 | 615 / 500 / 325 / 335 / 44 / 1950 mm |
| Ingress protection rating | IP20 |
| Finish | white, gray, black |
| Weight | 16kg |
| Luminaire luminous flux (t _a =25°) | 11295 lm |
| Total power | 95W |
| Luminaire light output | 119lm/W |
| Light colour temperature /CRI | 4000K / >80 |
| LED service life | 50000 L70B10/3SCDM |
| Power supply | 220-240 V 50-60 Hz |
| Control gear | DALI Touch Dimm |

HOUSING of extruded aluminium. Finish: epoxy polyester powder coating. Fine structured texture. Available in white, black, gray. Housing design enables good serviceability with easy access to electrical components.





Adjusting to horizontal position by fine tuning of lighting head.

Smooth integration into interior design: U shaped base plate (only 12mm of height), for easy positioning under the furniture, such as shelves, drawers and closets. Polyurethane pads for easy sliding on flat surfaces.



5 MINUTE
ASSEMBLY

Portable, independent from socket positions. Supplied with a 4 m long cord with a plug. For your convenience, packed in three separate boxes.

